



# GreensPro® 1260

## Greens Roller

## DELIVERING FAST, SMOOTH GREENS. EASILY.


The GreensPro 1260 is in a league of its own, delivering exceptionally smooth and fast greens with a superior operator platform. The split, overlapping, contour-following smoothing rollers perfectly follow undulations delivering exceptionally smooth putting surfaces. The operator platform is fully adjustable for unmatched comfort and operator safety. The transport system featuring a QuickLatch coupler makes transporting from green to green unbelievably quick and simple. Direct hydraulic motor drive for ease of operation and reduced maintenance. Exceptional greens rolling and ultimate useability. That's the GreensPro 1260.



[toro.com](http://toro.com)

## F E A T U R E S

- Overlapping smoothing rollers deliver unmatched consistency
- Fully adjustable operator platform for comfort and safety
- Independent, articulating smoothing heads follow undulations, preserving natural contours
- Light tongue weight makes maneuvering simple
- Innovative wheel caddy system for effortless transport to roll conversions
- Hydraulic motor drive for ease of operation and reduced maintenance

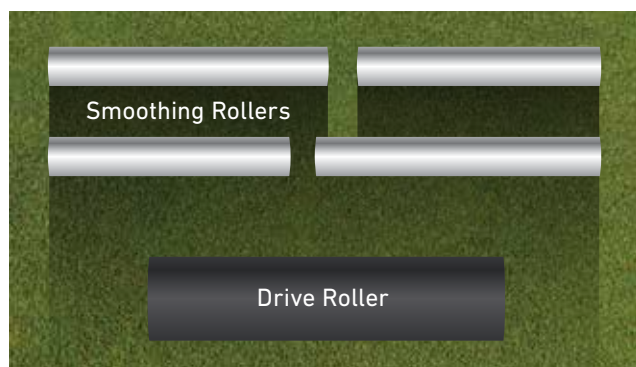

*Offset smoothing roller design for uniform greens appearance and playability.*

# GreensPro 1260

The Toro GreensPro 1260 riding greens roller is the perfect rolling tool for fine sporting turf such as golf greens, bowling greens and tennis courts. Turf that requires a smooth, high performance surface for optimum playing will benefit from precision greens rolling with the GreensPro 1260.



## GREENSPRO 1260, MODEL 44913\*

ENGINE	Honda® GX200 5.5 hp (4.1 kW) @3600 RPM, air-cooled, 4-stroke OHV; mechanically governed.
FUEL	Unleaded gas
TRANSMISSION	Hydrogear PG Pump
DRIVE	Parker hydraulic motor to drive roller
SMOOTHING ROLLS	3.44" (87.5 mm) diameter - 4 split rollers. Overlapping twin steering heads.
TRACTION DRIVE ROLLER	7.24" (183.9 mm) diameter vulcanized rubber coated cylinder, 31.5" (80 cm) long
ROLLING WIDTH	47.2" (120 cm)
GROUND SPEED	Roll: 0-8 mph (0-12.8 km/h) in either direction
CONTROLS	Tilt steering wheel, directional foot pedals, parking brake
CONTOUR FOLLOW	Yes
GROUND PRESSURE	3.75 PSI (0.26 Bar)
STEERING	Wheel, adjustable tilt to 40°
SEAT	High-back, adjustable
TRAILER	Integrated with QuickLatch towing system
LIFTING TYRES	16 x 6.50 - 8
LIFTING TYRE PRESSURE	15 PSI (1.03 Bar)

## OVERALL DIMENSIONS

WIDTH	48" (122 cm)
LENGTH	53.5" (136 cm)
HEIGHT	42" (107 cm)
WEIGHT	679 lbs. (309 kg)
WARRANTY	Two-year limited warranty. Refer to operator's manual for further details.

\*Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. See distributor for details on all warranties.



### toro.com

Worldwide Headquarters  
The Toro Company  
8111 Lyndale Ave. So.  
Bloomington, MN 55420 U.S.A.  
Phone: (1) 952 888 8801  
Fax: (1) 952 887 8258

Printed in U.S.A.  
©2017 The Toro Company.  
All Rights Reserved.  
200-7741 GB



facebook.com/ToroCompany  
twitter.com/TheToroCompany  
youtube.com/ToroCompanyEurope



Count on it.